




DYRL-UP-RU-HVG

CLEVEREVAC DYNAMIC GREEN & RED X BLADE EXIT SIGN (ZONEWORKS XT HIVE)

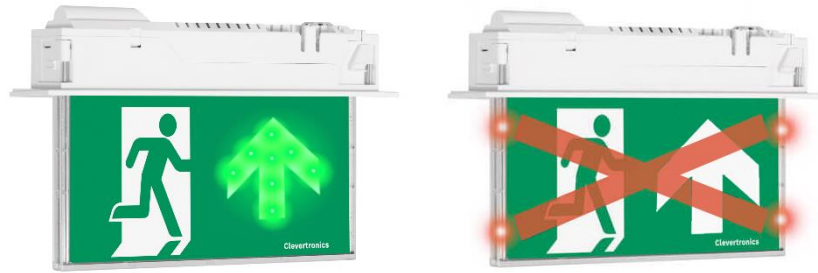

PRODUCT INFORMATION					
Part Number	DYRL-UP-RU-HVG				
MIC	UKA01850070001				
Description	L10 Optimum CleverEVAC Dynamic Green and Red X Blade EXIT sign, with Volt Free (VF) & 24V interface for ON/OFF activation of Dynamic Green & Red X Enhancement				
Construction	PC/ABS body with Acrylic diffuser				
Mounting	Recessed, Single Sided				
Dimensions L x W x H	385mm x 67mm x 257mm				
Weight	3.3kg				
Operating Mode	Maintained – Sequencing inward green LEDs or illuminated Red X with side flashing red LED's activated on VF/24V input trigger and capable of being activated in power-on and battery-backed mode				
Testing System	Zoneworks XT HIVE (RF)				
Battery Type & Manufacturer	Lithium Nanophosphate (LiFePO4), Clevertronics				
Charging Method	Intelligent current limited constant voltage				
Diffuser	Single sided Pictograph, two elements (Running Man with Arrow Up)				
Lamp(s)	LED panel, 100,000 hours				
Operating Voltage	220-240V AC; 50Hz				
Power Consumption	2.0 Watts (Standby), 9.0 Watts (Max)				
Viewing Distance	30m				
Rated Emergency Duration	180 minutes				
IP Rating	IP20				
Operating temperature	0°C to 40°C				
Protection	<ul style="list-style-type: none"> Battery overvoltage & overcurrent protection Battery deep discharge protection Supply voltage polarity reversal protection Battery short-circuit protection (charging will resume upon removal of fault) Kit box (enclosure) of lamp control gear provides protection against accidental contacts with live parts 				
Luminaire Classification	<table border="1" style="width: 100%; text-align: center;"> <tr> <td>X</td> <td>1</td> <td>AFG</td> <td>180</td> </tr> </table>	X	1	AFG	180
X	1	AFG	180		
Conformity	BS EN 60598-2-22, BS 5266				

REPLACEMENT PARTS	
PART NUMBER	DESCRIPTION
1530250	BATT:L10 3.3V 5AH. SBS
1530050	BATT:L10 3.3V 2.5AH 70mm lead, no BRKT
UKM01870180001 DYRL-UP-CKIT-HVG	Dynamic Red, UB Pro, Control Only, L10, HVG (incl Hive node)
8003330	PCA: 2.4Ghz RF Node CT10748-A1 Int Antenna

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice