




CLEVERTRONICS LP SWINGBLADE LED EXIT (DALI)

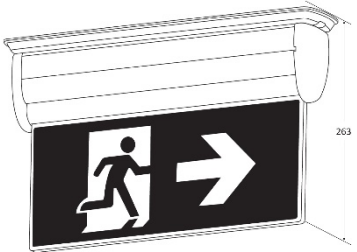

PRODUCT INFORMATION

Catalogue Number	CSBLED-DALI
Description	LP Premium Swingblade Emergency Exit
Construction	Metal frame, White End Caps with Acrylic & Polycarbonate Diffuser
Mounting	Surface Mount, Wall or Ceiling on a slide connect bracket – Single & Double Sided "NOTE: If product is suspended below the Ceiling or Mounted on a metal surface the Swingblade bracket cover plate accessory (P/N:2740100) is required to cover the mains terminals."
Dimensions L x W x H	See diagram above
Weight	2.6kg
Operating Mode	Maintained
Testing System	DALI compatible
Battery	Lithium Iron Phosphate, 3.2V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	All directional inserts included in the box
Lamp(s)	24 x High Intensity LED, Surface Mounted onto a Replaceable Lamp Bar - 100,000hour
Operating Voltage	240V AC; 50Hz
Power Consumption	3.5 Watts (Standby), 6.2 Watts (Max)
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C ₀ =D10 C ₉₀ =E3.2
Viewing Distance	24m

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550070	BATT:LP 3.2V 3200mAh 220mm lead, sp.BRKT
8002355	PCA:Lithium S/BLADE Driver. #CT10164-L4.
8002175	PCA:24DLED UB LED Strip, #CT10156-D2
8002200	PCA:DALI Node, #CT10410-A3

DALI EM

LP LITHIUM IRON PHOSPHATE

PREMIUM

PROVEN PROJECT PERFORMANCE